

ECOLOGY NORTH AMERICA E150E-A

TYPE	Pass-through dishwasher
LINE	ECOLOGY NORTH AMERICA
BASKET	500x600
SIZE	720x770x1435/1900h - 28.3465x30.315x56.4961/56.4961in



The E150E-A hood type dishwasher can wash up to 22 pizza dishes in a very tight space: only 720 mm wide while maintaining the same depth of traditional inlet/outlet stainless steel tables, with a maximum productivity of 60 racks/hour (1320 dishes/hour). Thanks to the powerful wash pump and washing arms, it is suitable for dishes, objects, bread racks, GN 1/1 and 600x400 baking trays as its rack can fit utensils measuring up to 500x600x410(h)mm. The hood type models are fitted with an easily removable rack support for easy cleaning and a rounded moulded tank with integral filters for perfect draining and absolute hygiene. The "PUSH TO START" cycle start system ensures less waste preventing the start of empty washes.

This model is **ETL** certified as it complies with the requirements of **UL Std.921**

The dishwashers of the ECOLOGY line ensure maximum performance thanks to the standard Acquatech System which, through an atmospheric boiler and rinse pump, maintains constant temperature and pressure and optimum water consumption. Ecology ensures a sanitising rinse cycle and proves to be the perfect choice for canteens, nursing homes, pastry shops, bakers and butchers where compliance with HACCP rules is essential. For those who seek glass perfection, it is possible to connect a Reverse Osmosis System which purifies water and reduces detergent and rinse-aid consumption, ensuring excellent results and perfect glasses without the need for hand drying.


The electronic control allows you to manage various parameters to give you an absolute customisation level and the continuous self-diagnosis allows you to minimise machine downtime, suggesting some operations to be verified. The self-cleaning cycle at the end of the day cleans the wash tank and empties the boiler from the hot water, preventing limestone forming inside. The standard double peristaltic electric rinse-aid and detergent dispenser ensures the best result from each wash cycle with great savings thanks to the precise dosage managed by the electronic card; whereas, the moulded washing and rinsing arms ensure great reliability and durability. The Thermo-stop function checks that washing and rinsing begin only when the desired temperature is reached. The bodywork is made entirely of AISI 304 steel and has been designed with all components in the front to allow easy technical assistance. Sturdy and reliable dishwashers to best deal with every moment of your day.

CERTIFIED



ON REQUEST



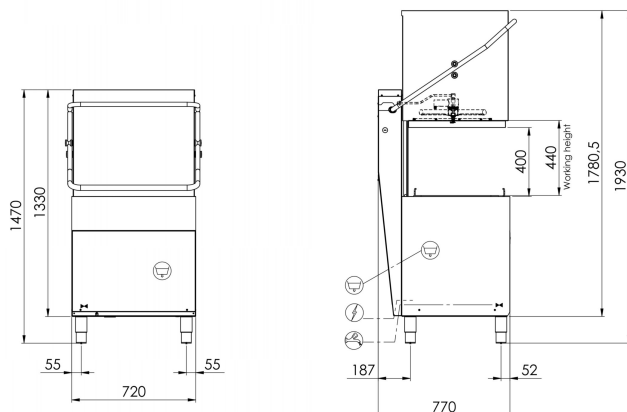

DISHWASHERS FEATURES

Dimensions - (mm) L - P - H	720x770x1435/1900h - 28.3465x30.315x56.4961/56.4961in
n° baskets/hour - (+55°C)	Max 60
Ø height plate max	400mm
LT bread basket	60 (H=400mm)
Trays	GN1/1 - 60x40
Tank heating element - Tank capacity	4,5kW - 37lt
Boiler heating element - Boiler capacity	4,5kW - 37lt
Washing pump	1,34kW / 1,8 Hp
Total power input / Current	6,74kW / 16A
Standard input voltage	"208V - 60Hz 230V3 - 60Hz"
Recommended inlet water temperature	+55°C
Water hardness	7÷10 °f
Water consumption per cycle (inlet suggested pressure 2 BAR)	2,0lt GUARANTEED
Adjustable detergent and rinse-aid dispenser	ELECTRIC
Acquatech system rinse	si
Packing	800x980x1520h 1,19/162

STANDARD EQUIPMENT

Basket for trays 10/12 compartments 500x600x100mm	1
Basket for glasses dim.500x600x100mm	1
Basket for 22 dishes dim.500x600x100mm	1
8 division cutlery insert	1
Integral tank filter	2

OPTIONAL

Drain pump kit 32W with Ecoclean	●
Basket for trays with 4 compartments dim.500x500x200mm	●
Inclined basket for wine glasses dim.500x500x170mm	●
Kit 4 Stainless steel feet 50-70mm	-
"Energy Pro Green" System	●

● Optional Installabile, - Optional not installabile

CERTIFIED



ON REQUEST

