

SYSTEM LINE SL2100

TYPE	Rack conveyor dishwashers
LINE	SYSTEM LINE
BASKET	500x500
SIZE	1700x770x1810h mm





The SYSTEM Line has been designed to meet the needs of every customer, thanks to the various accessories installable, combining large workloads and optimising spaces available, simplifying operator work and reducing consumption. The models of this line are equipped with a double filtration system that retains all residues, whereas the vertical wash pumps and stainless steel wash arms ensure great performance. SYSTEM is also equipped with counterbalanced doors with double wall and anti-fall system and rounded moulded tanks.

CERTIFIED



ON REQUEST



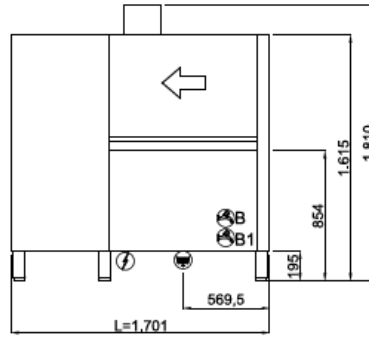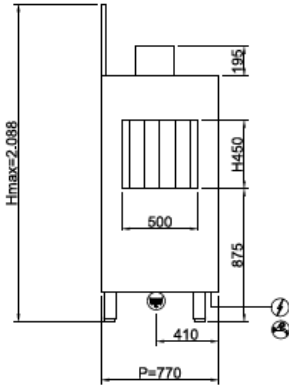

400V3N+T 24,80kW
(CABLE NOT PROVIDED)



G 3/4" M
B: 55°C
B1: 10°C
L=1500



Ø1"1/2 M
L=1500

STANDARD EQUIPMENT

Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	2

DISHWASHERS FEATURES

Dimensions - (mm) L - P - H	1700x770x1810h mm
Basket dimensions	500x500 mm
n° baskets/hour	200/150/95
Passage height max (cm)	450 mm
Total power input	25,1 kW (15°C)
Standard input voltage	400V3N - 50 Hz

WASHING

Tank capacity (lt)	70 lt
Washing pump	1,5 kW - 2 hp
Tank heating element (kW)	10,5 kW

FINAL RINSING

Break-Tank and rinse pump	0,2 kW
Boiler heating element (kW)	12 kW
Water consumption	160 l/h
Inlet water temperature (°C)	+15°C
Minimum water pressure (BAR)	2 bar
Water hardness (°f)	7°f - 10°f

RECUPERATORE_TERMICO_CALORE

Exhauster	0,2 kW
Air capacity	70 m3/h

STANDARD EQUIPMENT

Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	2
4 division cutlery insert	1
Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	2

OPTIONAL

Corner dryer unit	●
Option extra power 9,5 Kw	●
Internal detergent & rinse-aid dosing unit	●
Triple tank filter and stainless steel drawer	●

● Optional Installabile, - Optional not installabile